



D 250 AHG
D 350 AHG
D 400 AHG



www.ausa.com




AUSA Center, S.L.
Ctra. de Vic Km 2.8
08243 Manresa
BARCELONA (ESPAÑA)
Tel.: +34 93 874 73 11
E-mail: ausa@ausa.com
www.ausa.com

AUSA Madrid Pol. Ind. Coslada - C. Marconi 15-17, 28823 Coslada - MADRID (ESPAÑA) - Tel.: +34 91 669 00 06 - E-mail: ausa.madrid@ausa.com
AUSA France Z.I. Saint Charles - Rue de Zürich, 66000 PERPIGNAN (FRANCE) - Tel.: +33 (0) 4 68 54 38 97 - E-mail: ausa.france@ausa.com
AUSA Deutschland Tel.: +49 (0) 2384 9889905 - E-mail: ausa.deutschland@ausa.com
AUSA UK Tel.: +44 (0) 7970639988 - E-mail: ausa.uk@ausa.com
AUSA Brasil Avenida Belizario Ramos 2276 - Lages - SC, 88506-000 (BRASIL) - Tel.: +55 11 9 8786 6014 - E-mail: ausa.brasil@ausa.com
AUSAMéxico Calzada Vallejo 725 Del. Gustavo A. Madero - 07750 México D.F. (MÉXICO) - Tel.: +52 (55) 21669276 - E-mail: ausa.mexico@ausa.com
AUSA U.S. CORP. Tel.: +1 (917) 328 0770 - E-mail: ausa.us@ausa.com
AUSA Beijing Rep. Office Room 403, Moma Building, N.199 - Chaoyang bei road, Chaoyang District - 100026 BEIJING (CHINA)
Tel.: +86 10 8598 7386 - E-mail: ausa.china@ausa.com

D 250 AHG_2500 Kg
D 350 AHG_3500 Kg
D 400 AHG_2500 Kg

AUSA
www.ausa.com

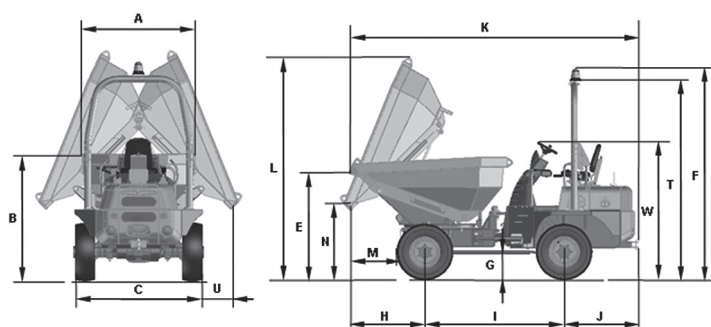

DIMENSIONS (mm)	D 250 AHG	D 350 AHG	D 400 AHG
A	1503	1852	1866
B	1694	1740	1838
C	1755	1858	1858
E	1500	1506	1590
F	2915	2956	2956
G	347	395	395
H	1050	1024	1200
I	1920	1932	1950
J	1025	1025	1007
K	3975	4120	4353
L	3070	3105	3150
M	660	590	766
N	1050	1035	860
T	2705	2770	2770
U	364	327	502
W	1909	1940	1940

TECHNICAL SPECIFICATIONS

Load capacity (Kg)		2500	3500	4000
Unloading system		Hydraulic, 180° rotating		
Chassis		Articulated and oscilating		
Hopper capacities (l)	Water	818	1050	1350
	Levelled	1200	1726	2163
	Heaped	1910	2737	2941
Engine	Diesel	Kubota V2403M		
	Power acc./SAE J 1995 (KW/HP)	36.5 / 49.6		
	N° of Cylinders	4		
	Cooling system	Water		
Traction		4 x 4 permanent		
Transmission		2-speed hydrostatic. Front-reverse direction electro-hydraulic operated. Axles with planetary reduction on differential output		
Engine starting system		Electric		
Speed (max.) (km/h)		20	21	21
Unladen weight (Kg)		2650	2780	2830
Gradient negotiable (with full load)		70%	54%	49%
Hydraulic circuit		Gear pump of 12 cc. Working pressure 180 bar		
Tyres		10,0/75-15.3	11.5/80-15.3 (14 PR)	11.5/80-15.3 (14 PR)
External turning circle		4225	4680	4720
Steering		Hidraulic		
		Working pressure 110 bar		
Tank capacity (l)	Fuel	44		
	Hydraulic fluid	40		
Service brake		Oil-immersed, multidisc, hydraulically operated		
Parking brake		Oil-immersed, multidisc, mechanically operated		
STANDARD EQUIPMENT		Foldable ROPS arch		
		Anti vandal system		
		Ergonomic seat with safety belt		
		Rotating beacon		
		Audible reverse warning		
OPTIONAL EQUIPMENT		Homologated lighting system		
		Full visibility System through (FVS) front and rear cameras and TFT water-proof color 7" display for a total visibility and nightvision by infrared up to 10 m.		
		Towing hitch (Rockinger) without electric socket		
		Water-tight case for operation and maintenance manuals		
		Stop emergency on controls dashboard		
		Gelamina safetyv stickers on rear body		

MKT20015.08 / 02.2016

AUSA reserves the right to make any changes in the specifications without prior notice.